

266xs Compressor

Compressor/Gate

dbx
by HARMAN



Bring a more professional sound to your mix

Adding a dbx® 266xs Compressor/Gate to your live sound rig or studio gives you more dynamic control to help create a more polished, professional sound. Having compression in your audio chain gives you the ability to smooth out uneven levels, add sustain to guitars and fatten up your drum sound. It also makes it easy to bring vocals to the front of your mix - adding greater clarity and making them stand out from the surrounding instruments.

dbx knows compressors...after all we invented them! The 266xs is the latest in a long line of the world's most successful compressors from the inventors of the technology. Its patented Overeasy® compression technology provides smooth and musical performance while the AutoDynamic™ attack and release controls, found only on dbx compressors, puts great sound within easy reach. The 266xs can operate in stereo or dual-mono modes, has true RMS power summing and features XLR and 1/4" TRS inputs and outputs. It cuts no corners on visual feedback with gain reduction metering and easy-to-read backlit switches.

Features

- ▶ Error-proof operation to smooth uneven levels, add sustain to guitars, fatten drums or tighten up mixes
- ▶ New gate timing algorithms ensure the smoothest release characteristics
- ▶ Program-adaptive expander/gates
- ▶ Great sounding dynamics control for any type of program material
- ▶ Separate precision LED displays for gain reduction, compression threshold and gate threshold allow quick, accurate setup
- ▶ Stereo or dual-mono operation
- ▶ Balanced inputs and outputs on 1/4" TRS and XLR connectors
- ▶ Side Chain insert
- ▶ Classic dbx "Auto" mode

Who uses this product:



BANDS



DJs



SOUND
INSTALLATION



STUDIO



BROADCAST

dbx Professional
Products

8760 S. Sandy Pkwy.
Sandy, Utah 84070

1.801.568.7660 PHONE
1.801.568.7662 FAX


1.801.568.7583 INT'L FAX
customer@dbxpro.com

www.dbxpro.com



266xs Compressor

Compressor/Gate

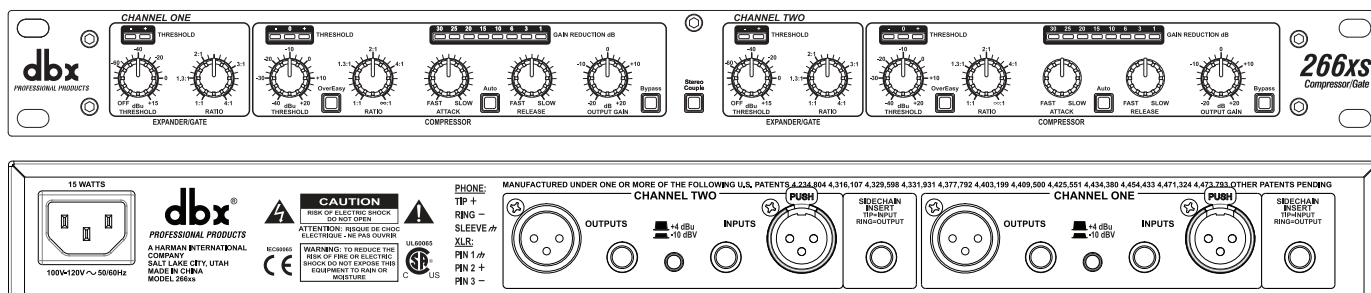

Specifications

INPUTS:

Type: 1/4" TRS, female XLR (pin 2 hot)
Electronically balanced/unbalanced, RF filtered
Impedance: Balanced 40k Ω , unbalanced 20k Ω
Max Input Level: >+22dBu balanced or unbalanced

OUTPUTS:

Connectors: 1/4" TRS, male XLR (pin 2 hot)
Type: Impedance-balanced/unbalanced, RF filtered
Impedance: +4 dBu: Balanced 100 Ω
unbalanced 50 Ω
-10 dBu: Balanced 1k Ω
unbalanced 500 Ω
Max Output Level: >+21dBu balanced/unbalanced into 2k Ω or greater
>+18dBm balanced/unbalanced (into 600 Ω)

SIDECHAIN INSERT:

Normalised: Tip is Input, Ring is Output
Tip: Impedance >10k Ω
Maximum Level >+22dBu
Ring: Impedance 2k Ω
Maximum Level >+20dBu

COMPRESSOR:

Selectable OverEasy® or hard-knee
Threshold Range -40dBu to +20dBu
Compression Ratio 1:1 to Infinity:1
Attack Time Scalable Program-Dependent AutoDynamic™
Release Time Scalable Program-Dependent AutoDynamic™

EXPANDER/GATE:

Threshold Range -60dBu to +10dBu
Expansion Ratio 1:1 to 4:1
Attack Time <100 μ Sec
Release Time Program-Dependent

SYSTEM PERFORMANCE:

Bandwidth: 0.35Hz - 90kHz, +0, -3dB
Frequency Response (Flat): 20Hz - 20kHz, +0/-0.5dB
Noise: <-93dB, unweighted (22kHz measurement band width)
THD+N: <0.2%; Any amount of compression at 1kHz
Intermodulation Distortion: <0.2% SMPTE
Dynamic Range: >114dB, unweighted
Interchannel Crosstalk: <-95dB, 20Hz to 20kHz
Common Mode Rejection: >40dB, typically >55dB @ 1kHz
Stereo Coupling: True RMS Power Summing™

POWER SUPPLY:

Power Requirements 15 Watts
Operating Voltage 100VAC -120VAC 50/60Hz; 230VAC 50/60Hz
Operating Temperature 32°F to 113°F (0°C to 45°C)

PHYSICAL:

Dimensions 1.75" x 5.75" x 19" (4.5cm x 14.6cm x 48.26cm)
Weight Net Weight: 4.84 lbs/2.19 Kg
Shipping Weight: 6.6 lbs/2.99 Kg

Note: 0dBu = 0.775VRMS

dbx engineers are constantly working to improve the quality of our products. Specifications are, therefore subject to change without notice.

dbx Professional
Products

8760 S. Sandy Pkwy.
Sandy, Utah 84070

1.801.568.7660 PHONE
1.801.568.7662 FAX

1.801.568.7583 INT'L FAX
customer@dbxpro.com

www.dbxpro.com

Part number: 18-0840